



Philadelphia Hardware Group, Inc.

6590 Top Gun St.
San Diego, CA 92121
www.philhardware.com
Tel: 858-642-0450
Fax: 858-642-0454
V052623

Advantage Exit Device ETL9 Series Escutcheon Lever Trim

Features


- Designed to Use with Grade 1 Exit Device
- Clutch Function Standard
- Standard For 1-3/4" Door Thickness
- Optional For 2" ~ 2-1/4" Door Thickness



Specifications

Certification	California State Reference Code: (Formerly Title 19, California State Fire Marshall Standard) For Levers with Returns to Within 1/2" of Door Face.
Exposed Trim	Wrought Zinc with Steel Construction, Pressure Cast Zinc Lever
Keys	2 Keys Per Set. Keying As Requested (KA, KD, MCK, MK, GMK)
Mortise Cylinder	SCC Standard Optional with SFIC, LFIC, KW1
Lever Style	CT (Charlotte), SD (San Diego)
Finishes (BHMA)	US26D (626), US10B (613), US19 (622)

Dimensions

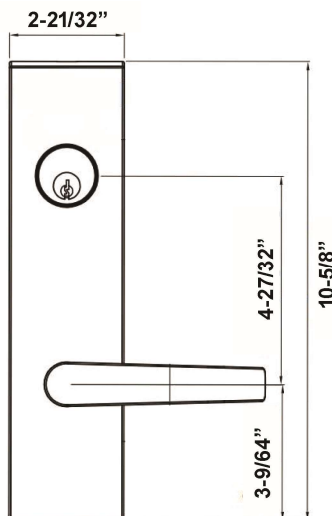

Functions

- ETL900 – Entry
- ETL904 – Storeroom
- ETL901 – Passage
- ETL915 – Dummy
- ETL900ICB – SFIC Entry*
- ETL904ICB – SFIC Storeroom*
- ETL900ICS – LFIC Entry**
- ETL904ICS – LFIC Storeroom**

*SFIC (Less Core)

** LFIC (Less Core)

SAN DIEGO • **CHICAGO** • **ATLANTA** • **DALLAS**