



Philadelphia Hardware Group, Inc.

6590 Top Gun St.
San Diego, CA 92121
www.philhardware.com
Tel: 858-642-0450
Fax: 858-642-0454



ES Series Electric Strike: ES-95

ES-95 for use with Rim Type Fire Exit Hardware on fire doors and frames with ratings up to and including 1.5 hours.

FEATURES

- Accommodates Max. 3/4" (19 mm) latch throw. Fits rim exit devices having Pullman type bolts without auxiliary bolts.
- 12/24VDC, field selectable.
- Field selectable **fail-safe / fail-secure**.
- Surface mount, Non-handed, fully reversible.
- Horizontal adjustment.
- Optional for latch monitoring (ES-95M)



ES-95


ES-95M

SPECIFICATIONS


- Operating Voltage: 12/24VDC.
- Current Draw: 540mA/12VDC; 270mA/24VDC
- Operating Temperature: 14°F~120°F (-10°C~ 49°C)
- Humidity: 0~85%
- Static strength: 1,500 lbs.
- Durability: 1,000,000 cycles
- Function: Field selectable fail-safe / fail-secure.
- Keeper width: 1-1/2" (38 mm).
- Material: Stainless steel surface

DIMENSIONS

8" x 1-3/4" x 3/4"

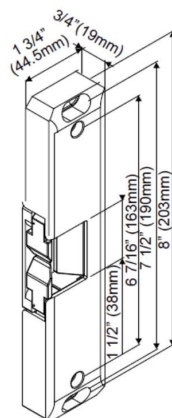

SURFACE MOUNT

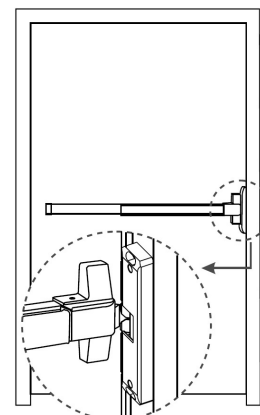

SAN DIEGO

CHICAGO

ATLANTA

DALLAS